

Declaration of conformity for the European Community

ATLINKS declares that the Temporis IP 600 telephone complies with the relevant basic requirements and provisions of the European directive 1999/5/CE. You can download the declaration of conformity from the following address: www.atlinks.com.

The CE logo shown on the products indicates that they are compliant with the basic requirements of all the applicable directives.



Declaration of conformity to the rule of the American Federal Communications Commission (FCC)

This equipment has been tested and declared compliant with the limitations relating to a class B digital device, in accordance with Subsection J of Section 15 of the FCC rules.

These provisions aim to ensure reasonable protection against harmful interferences when the device is used in a commercial environment. This equipment generates, uses and can emit radio energy and, if not installed in accordance with the instructions of this manual, can cause interference of such a nature as to affect radio communications. The use of this equipment in a residential area may cause harmful interferences to which the user is responsible for correcting at his own expense.

Environment



This symbol means that your inoperative electronic appliance must be collected separately and not mixed with the household waste. The European Union has implemented a specific collection and recycling system for which producers' are responsible.

This appliance has been designed and manufactured with high quality materials and components that can be recycled and reused.

Electrical and electronic appliances are liable to contain parts that are necessary in order for the system to work properly but which can become a health and environmental hazard if they are not handled or disposed of in the proper way. Consequently, please do not throw out your inoperative appliance with the household waste. If you are the owner of the appliance, you must deposit it at the appropriate local collection point or leave it with the vendor when buying a new appliance.

(a)- If you are a professional user, please follow your supplier's instructions.

(b)- If the appliance is rented to you or left in your care, please contact your service provider.


Please help us protect the environment in which we live!

Notice of copyright and trademarks

Copyright © 2011 ATLINKS. All rights reserved. ATLINKS reserves the right to change the technical specifications of its products without prior notice, so as to make technical improvements or respect new regulations. Alcatel and Temporis are registered trademarks. Alcatel logo and Alcatel name are trademarks of Alcatel and used under license by ATLINKS.

ALCATEL


Temporis IP 600 QUICK START GUIDE

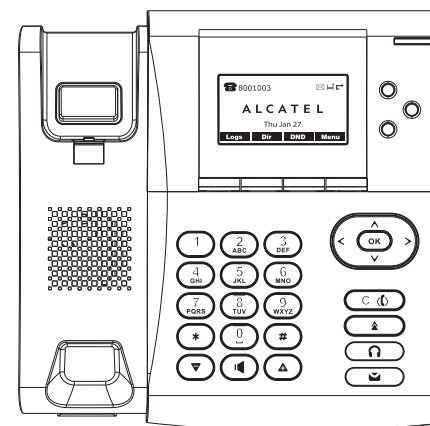

- Line keys
- Navigation keys
(up, down, left, right) +
short cuts to other functions
- Confirm key
- In editing/pre-dialling mode :
erase character/digits
In communication mode :
mute/unmute a call
During ringing : reject a call
- Access to redial list
- Headset key
- Access to voice mail.
When key is backlit : new messages
- During ringing : increase ringer volume
In communication : increase earpiece,
headset or handsfree volume
- Activate/deactivate handsfree
- During ringing : decrease ringer volume
In communication : decrease earpiece,
headset or handsfree volume



Soft keys



- Account register
- Account register successful
- Account registering failed
- In handset mode
- Handsfree mode activated
- In headset mode
- Call muted
- Missed calls
- Call in
- Call out
- Call forward
- Do not disturb function activated
- Auto answer activated
- Voicemail
- Call on hold
- Flashes when Internet is disconnected

Model : IP600
A/W No.: 10000271 Rev.0 (EN)
Printed in China

Phone web interface

1. Press **OK** to check phone IP address.
2. Open a web browser on your computer. Enter http:// and the IP address in the address bar and validate.
3. Default login and password are « user/user » for users and « admin/admin » for administrator
4. Minimum config is sip account. Check administrator guide for details.

Language setting

- Press **Menu** soft key -> 3.Settings-> 1.Basic->1. Language.
- Select the desired language and press **OK**.

Making a call

- **Pre-dialling** : enter the phone number and pick up the handset.
- **Direct dialling** : lift the handset and enter the phone number.
- **Handsfree** : enter phone number and press **📞** or vice versa .
- **Headset** : press **📞** enter phone number and **OK** .

Accepting a call

- **With the handset** : pick up the handset.
- **With a headset**: press **📞** .
- **With the handsfree**: press **📞** .

Putting a call on hold

- Press the **Hold** soft key. To retrieve the call, press **Resume** soft key.
- Note:** with more than one active call, select call with **▲** and **▼** arrows and use the corresponding soft key to hold or resume.

3-party conference

1. Once in line with 1st caller, press a line key, 1st caller is put on hold
2. Dial 2nd party number.
3. Then press **Conf** soft key to establish the conference.

Call transfer

Attended transfer:

1. Press **Tran** soft key during the active conversation, the call is put on hold.
2. Dial the second telephone number.
3. When the call is answered, then hang up or press **Tran** soft key to complete the transfer.

Blind transfer:

1. Press **Tran** soft key during the active conversation, the call will be on hold.
2. Dial the other telephone number and press **Tran** soft key or hang up.

Call forward

1. Press **▼** .
 2. Enter the destination number and press **OK** .
- Note:** to disable Call Forward press **▼** again. To change destination number or forward type, go through **Menu** soft key>2. Features>1. Call Forward

Call list

1. Press **Logs** soft key to enter call log.
2. Scroll through the list using **⬆** **OK** **⬆** .

Phonebook

Access phonebook:

1. Press **Dir** soft key.
2. Select **Local Directory** or other phonebook and press **OK** .

Add new entry:

1. Press **Add** soft key .
2. Enter name , then press **▼** .
3. Enter number press **OK** or **Save** soft key.

Redial

1. Press **📞** , select desired call and press **Send** soft key.

Note: In off hook mode, last dialled number is sent.

Do not disturb feature

1. Press **DND** soft key to enable or disable this feature.

Voice mail

1. When there are new messages (envelope key is backlit), you can access to Voicemail by pressing **✉** .